


# EKJ-P

## GARDEN PUMP




EKJ-602P / EKJ-802P

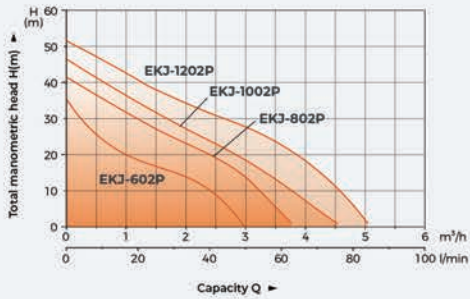

EKJ-1002P / EKJ-1202P

# EKJ-I

## GARDEN PUMP

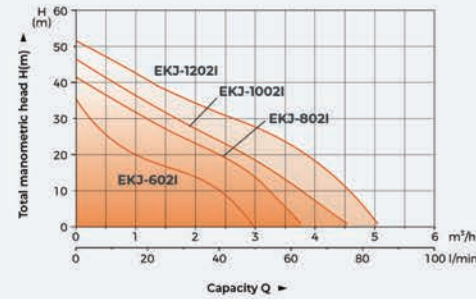

EKJ-602I / EKJ-802I



EKJ-1002I / EKJ-1202I

### Features

- Self-priming garden pump, also suitable for the pressurization of water in domestic applications.
- Compact, robust and easy to use.
- Motor with thermal protector
- Equipped with engineering plastic pump body

### Features

- Self-priming garden pump, also suitable for the pressurization of water in domestic applications.
- Compact, robust and easy to use.
- Motor with thermal protector
- Equipped with cast iron pump body

Model	EKJ-602P	EKJ-802P	EKJ-1002P	EKJ-1202P
Rated Power	600 W	800 W	1000 W	1200 W
Max. Head	35 m	40 m	45 m	50 m
Max. Flow	3.0 m³/h	3.7 m³/h	4.5 m³/h	5.0 m³/h
Max. Suction Depth	7 m	7 m	8 m	8 m
Outlet/Inlet	1"×1"	1"×1"	1"×1"	1"×1"
Power Cable Type	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m
Protection Class	IPX4	IPX4	IPX4	IPX4
Max. Delivery Temperature	35 °C	35 °C	35 °C	35 °C
Package Dimension	365x225x225 mm	365x225x225 mm	410x250x250 mm	410x250x250 mm
Package Gross Weight	6.5 kg	7.4 kg	9 kg	10 kg
Qty/20'GP	1500	1500	960	960

Model	EKJ-602I	EKJ-802I	EKJ-1002I	EKJ-1202I
Rated Power	600 W	800 W	1000 W	1200 W
Max. Head	35 m	40 m	45 m	50 m
Max. Flow	3.0 m³/h	3.7 m³/h	4.5 m³/h	5.0 m³/h
Max. Suction Depth	7 m	7 m	8 m	8 m
Outlet/Inlet	1"×1"	1"×1"	1"×1"	1"×1"
Power Cable Type	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m	H07RN-F 1.5m
Protection Class	IPX4	IPX4	IPX4	IPX4
Max. Delivery Temperature	35 °C	35 °C	35 °C	35 °C
Package Dimension	350x210x210 mm	350x210x210 mm	410x250x250 mm	410x250x250 mm
Package Gross Weight	8.5 kg	9.4 kg	11.8 kg	12.8 kg
Qty/20'GP	1720	1720	960	960