



LKS-S

SUBMERSIBLE PRESSURE PUMP

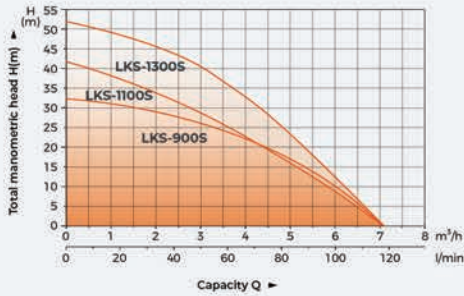

LKS-SE

AUTOMATIC SUBMERSIBLE PRESSURE PUMP

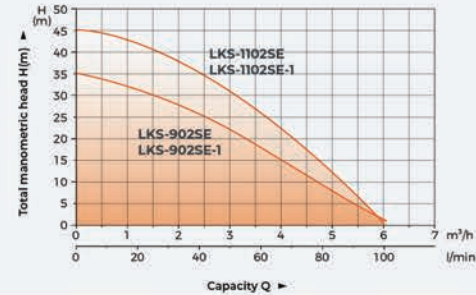

Features

Powerful multistage submersible pump ideal for rainwater systems, operating sprinklers, pumping water from cisterns, tanks, ponds, wells and other applications that require high pressure.

Motor with thermal protector.

Application

Can be used for transfer clean water or other liquids similar to water in physical and chemical properties.

Suitable to be immersed in water for lifting water from well or the pool, and draining water from the basement.

Model	LKS-900S	LKS-1100S	LKS-1300S
Rated Power	900 W	1100 W	1300 W
Max. Head	32 m	42 m	52 m
Max. Flow	7 m ³ /h	7 m ³ /h	7 m ³ /h
Max. Depth of immersion	7 m	7 m	7 m
Max. Dia of Particle	1 mm	1 mm	1 mm
Outlet	1"	1"	1"
Power Cable Type	H07RN-F	H07RN-F	H07RN-F
Length of Power Cable	10 m	10 m	10 m
Protection Class	IPX8	IPX8	IPX8
Impellers	3	4	5
Max. liquid Temperature	35 °C	35 °C	35 °C
Qty in carton box	1 pcs	1 pcs	1 pcs
Package Dimension	480×250×210 mm	502×250×210 mm	527×250×210 mm
Package Gross Weight	11.2 kg	12.3 kg	13.2 kg
Qty/20'GP	920	880	880
Automatic function	Float Switch	Float Switch	Float Switch

Features

With built-in integrated electronics, designed to automatically start and stop the pump.

Compact, easy to use, with dry-running protection and built-in check valve.

Motor with thermal protector.

Application

Can be used for transfer clean water or other liquids similar to water in physical and chemical properties.

Suitable to be immersed in water for lifting water from well or the pool, and draining water from the basement.

Model	LKS-902SE	LKS-1102SE	LKS-902SE-1	LKS-1102SE-1
Rated Power	900 W	1100 W	900 W	1100 W
Max. Head	35 m	45 m	35 m	45 m
Max. Flow	6 m ³ /h	6 m ³ /h	6 m ³ /h	6 m ³ /h
Max. Depth of immersion	12 m	12 m	12 m	12 m
Max. Dia of Particle	1 mm	1 mm	1 mm	1 mm
Outlet	1"	1"	1"	1"
Power Cable Type	H07RN-F	H07RN-F	H07RN-F	H07RN-F
Length of Power Cable	15 m	15 m	15 m	15 m
Protection Class	IPX8	IPX8	IPX8	IPX8
Impellers	3	4	3	4
Max. liquid Temperature	35 °C	35 °C	35 °C	35 °C
Qty in carton box	1 pcs	1 pcs	1 pcs	1 pcs
Package Dimension	260×215×540 mm	260×215×565 mm	260×215×540 mm	260×215×565 mm
Package Gross Weight	10.4 kg	11.6 kg	10.4 kg	11.6 kg
Qty/20'GP	928	880	928	880
Automatic function	Aquasensor	Aquasensor	Aquasensor	Aquasensor