



# XKS-PL

## GARDEN PUMP

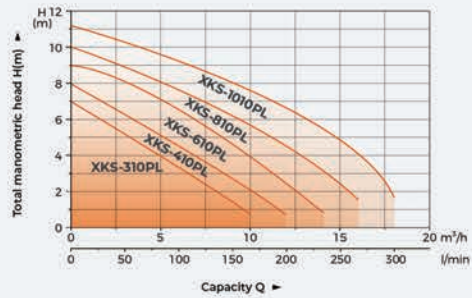

# XKS-PWL

## GARDEN PUMP

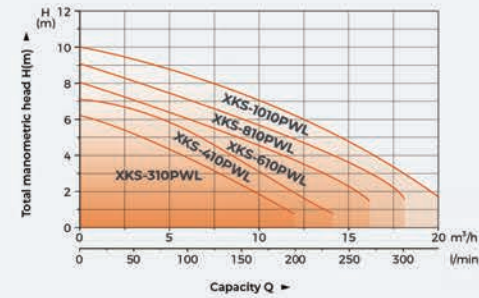

### Features

- Engineering plastic pump body
- Float switch ensures automatic cut-in and cut-out
- Built-in thermal protector

### Application

Can be used for transfer clean water or other liquids similar to water in physical and chemical properties  
Suitable to be immersed in water for lifting water from well or the pool, and draining water from the basement

Model	XKS-310PL	XKS-410PL	XKS-610PL	XKS-810PL	XKS-1010PL
Rated Power	300 W	400 W	550 W	750 W	1000 W
Max. Head	7 m	8 m	9 m	10 m	11 m
Max. Flow	10 m <sup>3</sup> /h	12 m <sup>3</sup> /h	14 m <sup>3</sup> /h	16 m <sup>3</sup> /h	18 m <sup>3</sup> /h
Max. Suction Depth	7 m	7 m	7 m	7 m	7 m
Max. Dia of Particle	5 mm	5 mm	5 mm	5 mm	5 mm
Outlet	1 1/4"	1 1/4"	1 1/2"	1 1/2"	1 1/2"
Power Cable Type	H05RN-F	H05RN-F	H05RN-F	H05RN-F	H07RN-F
Length of Power Cable	10 m	10 m	10 m	10 m	10 m
Protection Class	IPX8	IPX8	IPX8	IPX8	IPX8
Max. Delivery Temperature	35 °C	35 °C	35 °C	35 °C	35 °C
Qty in carton box	4 pcs	4 pcs	4 pcs	4 pcs	4 pcs
Package Dimension	420x350x330 mm	420x350x330 mm	420x350x330 mm	420x350x355 mm	420x350x355 mm
Package Gross Weight	17.7 kg	19.3 kg	21.3 kg	22.6 kg	26.2 kg
Qty/20'GP	2312	2312	2312	2144	2144
Automatic function	Float Switch	Float Switch	Float Switch	Float Switch	Float Switch

### Features

- Engineering plastic pump body
- Float switch ensures automatic cut-in and cut-out
- Built-in thermal protector

### Application

Can be used for transfer clean water or other liquids similar to water in physical and chemical properties  
Suitable to be immersed in water for lifting water from well or the pool, and draining water from the basement

Model	XKS-310PWL	XKS-410PWL	XKS-610PWL	XKS-810PWL	XKS-1010PWL
Rated Power	300 W	400 W	550 W	750 W	1000 W
Max. Head	6 m	7 m	8 m	9 m	10 m
Max. Flow	12 m <sup>3</sup> /h	14 m <sup>3</sup> /h	16 m <sup>3</sup> /h	18 m <sup>3</sup> /h	20 m <sup>3</sup> /h
Max. Suction Depth	7 m	7 m	7 m	7 m	7 m
Max. Dia of Particle	25 mm	25 mm	35 mm	35 mm	35 mm
Outlet	1 1/4"	1 1/4"	1 1/2"	1 1/2"	1 1/2"
Power Cable Type	H05RN-F	H05RN-F	H05RN-F	H05RN-F	H07RN-F
Length of Power Cable	10 m	10 m	10 m	10 m	10 m
Protection Class	IPX8	IPX8	IPX8	IPX8	IPX8
Max. Delivery Temperature	35 °C	35 °C	35 °C	35 °C	35 °C
Qty in carton box	4 pcs	4 pcs	4 pcs	4 pcs	4 pcs
Package Dimension	420x350x355 mm	420x350x355 mm	420x350x405 mm	420x350x405 mm	420x350x405 mm
Package Gross Weight	18.4 kg	20.0 kg	22.0 kg	23.2 kg	26.8 kg
Qty/20'GP	2144	2144	1904	1904	1904
Automatic function	Float Switch	Float Switch	Float Switch	Float Switch	Float Switch