



# XKS-S

## GARDEN SUBMERSIBLE PUMP

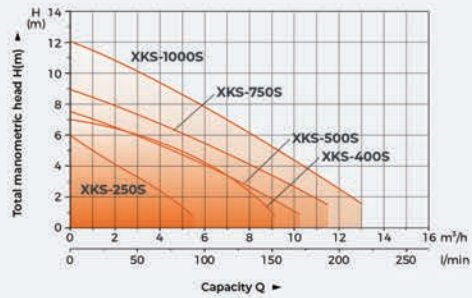

# AKS-SW

## GARDEN SUBMERSIBLE PUMP

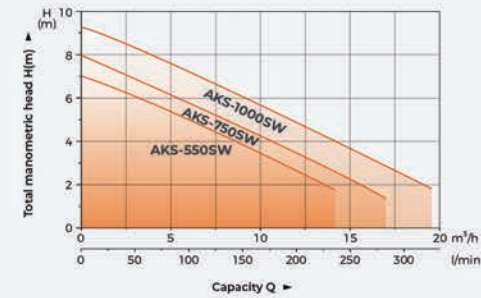

### Features

- Stainless steel pump housing
- Can stay permanently submerged in water
- Motor with thermal protector
- Not allowed to transfer saline water, flammable liquids and foodstuff
- Motor with thermal protector

### Application

- Can be used for transfer clean water or other liquids similar to water in physical and chemical properties
- Suitable to be immersed in water for lifting water from well or the pool, and draining water from the basement

Model	XKS-250S	XKS-400S	XKS-500S	XKS-750S	XKS-1000S
Rated Power	250 W	400 W	500 W	750 W	1000 W
Max. Head	6 m	7 m	7 m	8 m	12 m
Max. Flow	5.5 m³/h	8 m³/h	9 m³/h	11 m³/h	12 m³/h
Max. Depth of immersion	7 m	7 m	7 m	7 m	7 m
Max. Dia of Particle	5 mm	5 mm	5 mm	5 mm	5 mm
Outlet	1 1/4"	1 1/4"	1 1/4"	1 1/4"	1 1/4"
Power Cable Type	H05RN-F	H05RN-F	H05RN-F	H05RN-F	H07RN-F
Length of Power Cable	10 m	10 m	10 m	10 m	10 m
Protection Class	IPX8	IPX8	IPX8	IPX8	IPX8
Max. liquid Temperature	35 °C	35 °C	35 °C	35 °C	35 °C
Qty in carton box	4 pcs	4 pcs	4 pcs	4 pcs	4 pcs
Package Dimension	420x320x320 mm	420x320x320 mm	420x320x320 mm	420x320x320 mm	430x330x365 mm
Package Gross Weight	18.56 kg	19.56 kg	21.96 kg	23.24 kg	28 kg
Qty/20'GP	2552	2552	2552	2552	2064
Automatic function	Float Switch	Float Switch	Float Switch	Float Switch	Float Switch

### Features

- Suitable for pumping dirty water containing particles with maximum diameter up to 35mm.
- Float switch ensures automatic start and stop.
- Motor with thermal protector.

### Application

- Can be used for transfer clean water or other liquids similar to water in physical and chemical properties
- Suitable to be immersed in water for lifting water from well or the pool, and draining water from the basement

Model	AKS-550SW	AKS-750SW	AKS-1000SW
Rated Power	550 W	750 W	1000 W
Max. Head	7 m	8 m	9 m
Max. Flow	13.5 m³/h	16.5 m³/h	19.5 m³/h
Max. Depth of immersion	7m	7 m	7 m
Max. Dia of Particle	35 mm	35 mm	35 mm
Outlet	1 1/2"	1 1/2"	1 1/2"
Power Cable Type	H05RN-F	H05RN-F	H07RN-F
Length of Power Cable	10 m	10 m	10 m
Protection Class	IPX8	IPX8	IPX8
Max. liquid Temperature	35 °C	35 °C	35 °C
Qty in carton box	4 pcs	4 pcs	4 pcs
Package Dimension	440x350x410mm	440x350x410mm	440x350x410mm
Package Gross Weight	25.3 kg	26.7 kg	28.5 kg
Qty/20'GP	1120 pcs	1120 pcs	1120 pcs
Automatic function	Float Switch	Float Switch	Float Switch