



STAINLESS STEEL SEWAGE SUBMERSIBLE PUMP

SWm-SA



www.leopump.com

INTELLIGENT FLOW FOR GOOD

LEO GROUP PUMP CO., LTD.
LEO GROUP PUMP (ZHEJIANG) CO., LTD.

📍 No.1, 3rd Street, East Industry Center, Wenling, Zhejiang, 317511, P.R.China
🌐 www.leopump.com ✉ export@leopump.com
☎ +86-576-8998 6360 📠 +86-576-8998 9898



Website



Facebook



YouTube

LEO reserves all the right of products modification without prior notification

2025 v1.0


Motor and Pump

- Stainless steel casing
- Insulation class: F
- Enclosures class: IPX8
- Max. immersion depth: 5 m
- Max. liquid temperature: +50°C
- Copper wire motor with built-in overcurrent protector
- Stainless steel welded shaft
- Residual water level: 40mm


Features

- With float switch, designed to automatically start and stop the pump
- Dry-run protection


Identification Codes

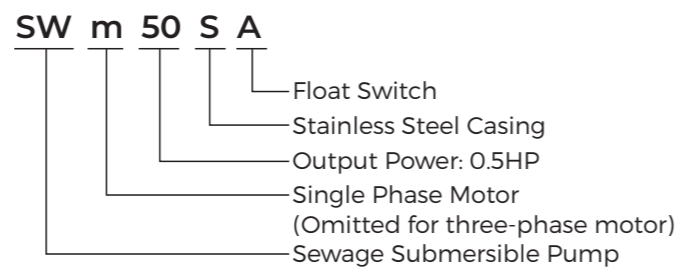

Application Scenarios

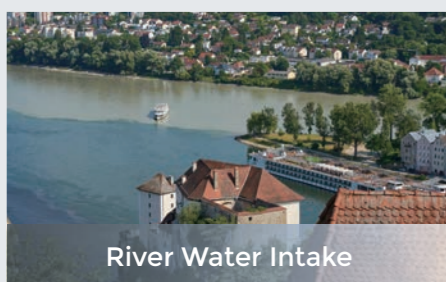


Hydraulic Performance Curves

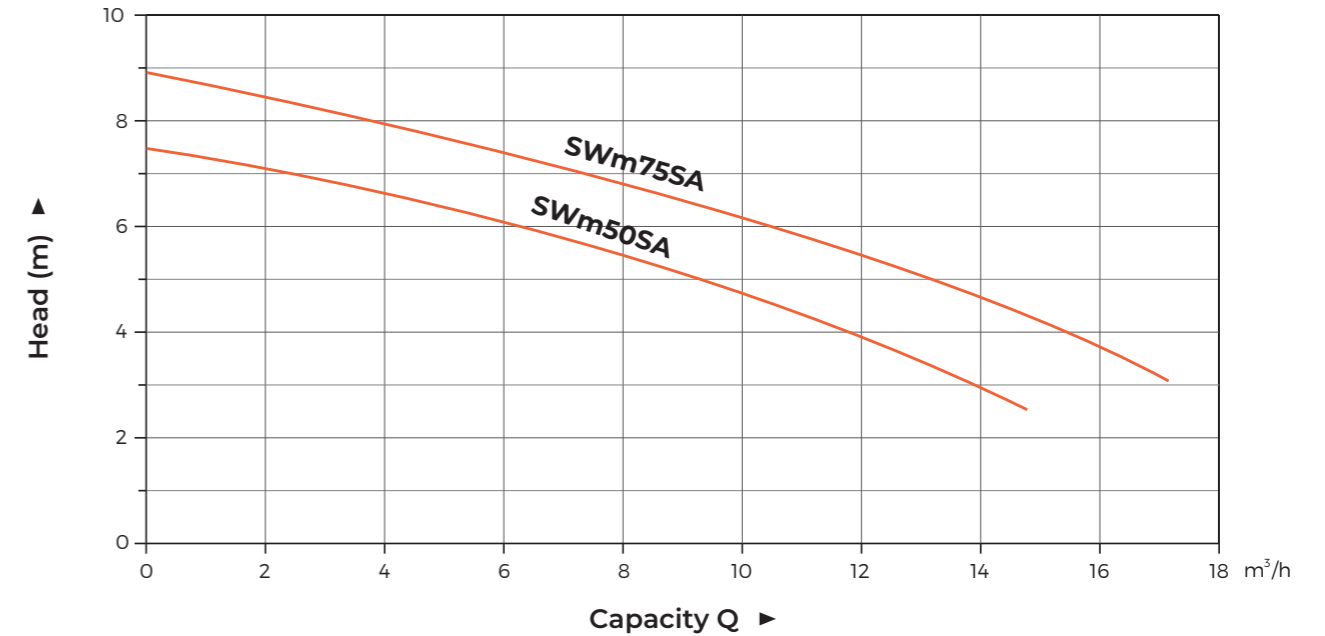

Technical Data

Model	Power		Rated Flow	Rated Head	Max. Flow	Max. Head	Max. Dia. of Particle
	kW	HP	m³/h	m	m³/h	m	mm
SWm50SA	0.37	0.5	9	5	14.5	7.5	40
SWm75SA	0.55	0.75	9	6	15.5	9	40

* The above data is for reference only.

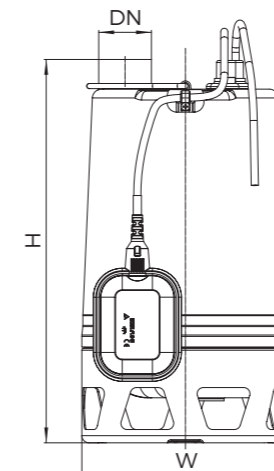

Dimension

Model	DN	H (mm)	W (mm)	Max.Solid Dia (mm)
SWm50SA	G 1 1/2"	373	202.5	40
SWm75SA				